


FLOOR MOUNTED BATH MIXER

This installation instruction is suitable for:

- | | | | | |
|--------------|-----------------|-----------------|--------------|-------------|
| • A69.08.V5 | • A67.08.V5.LH | • A68.08.V5.KN | • A76.08.V5 | • A50.08.V5 |
| • A69.08.V7 | • A67.08.V7.LH | • A68.08.V7.KN | • A76.08.V7 | • A50.08.V6 |
| • A69.08.V6 | • A67.08.V6.LH | • A68.08.V6.KN | • A76.08.V6 | • A50.08.V7 |
| • A69.08.V10 | • A67.08.V10.LH | • A68.08.V10.KN | • A76.08.V10 | |
| • A69.08.V11 | • A67.08.V11.LH | • A68.08.V11.KN | • A76.08.V11 | |

- 1) Flush waterlines on new installations before fitment to avoid damage to valve.
- 2) Install brass body to correct depth as shown in the drawing below.
- 3) When viewed from an operating position ensure hot water is plumbed to the left hand inlet & cold water to the hand inlet
- 4) Secure brass body to floor using bolts supplied. Ensure this is level and aligned correctly.
- 5) Fit plastic cap as a protective sleeve & remove on completion of tiling.
- 6) Push on copper tubes and secure brass fixing into the brass body already installed using bolts supplied.
- 7) Push down the dress flange.

Recommended Maximum Hydrostatic Pressure 500kPa (AS/NZS3500)

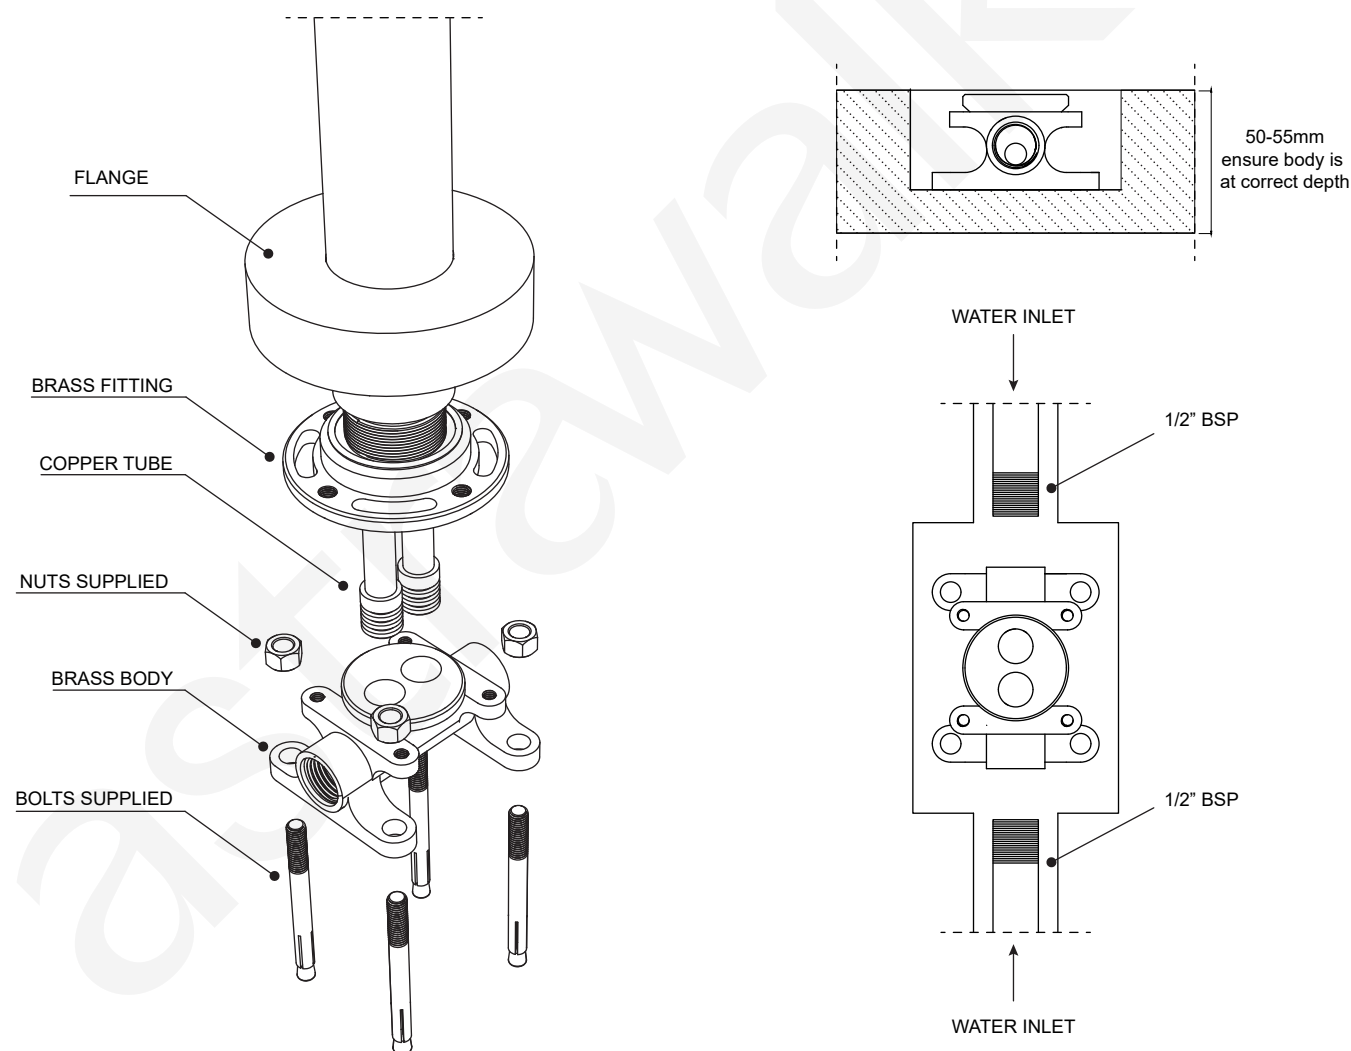

NOTE : The installation of this product must comply with the Australian Plumbing Installation code AS 3500.