

# avenir<sup>®</sup>

## Technical Specifications

VERSION 2019.07-001



# Solo

Heated & Non-Heated Towel Rails

## VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH1-45	TRN1-45	29 x 450mm	1 to 5	10 Watts
TRH1-65	TRN1-65	29 x 650 mm	1 to 5	14 Watts
TRH1-85	TRN1-85	29 x 850 mm	1 to 5	18 Watts




## NOTES


- This is a Low Voltage product
- In-Wall Kit required - TRCF105 - Max 5 rails (Sold separately)
- In-Wall Kit can be cut to length or into 2 pieces for split locations
- In-Wall Kit is installed behind wall lining or requires a 900mm high x 30mm wide x 25mm deep slot in wall render
- Supplied spigots can accommodate up to 30mm (Wall lining + adhesive and tiles)
- Longer spigots are available for thick stone / tiles - 50mm (YZF63 - Sold separately)
- Wire specifications: Use flexible multistrand 1mm<sup>2</sup> - Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)

## STANDARD FINISHES

<b>Mirror Polished</b> Stainless Steel  RRP	<b>Brushed</b> Stainless Steel  +20% (Stocked)	<b>Matt Black/White</b> Painted  +40% (Stocked)	<b>Gunmetal</b> PVD  +50% (Stocked)	<b>Brushed Gold</b> PVD  +60% (Stocked)
--	---	--	--	--

## SPECIFICATIONS

<b>Voltage</b> 12 Volts	<b>Standards</b> AS/NZ 60335.2.43	DEVELOPED IN <b>AUSTRALIA</b> 
<b>Material</b> Stainless Steel 304	<b>Electrical Connection</b> Concealed Wiring only - any leg (TRCF105 required)	HEATING TIME <b>30 MINUTES</b> 
<b>Finish</b> Mirror Polished	<b>Heating Method</b> Dry Internal Heating Element	WARRANTY <b>10 YEAR</b> 
<b>Ingress Protection</b> IPX5 (Suitable for wet areas)	Non-Heated version available	

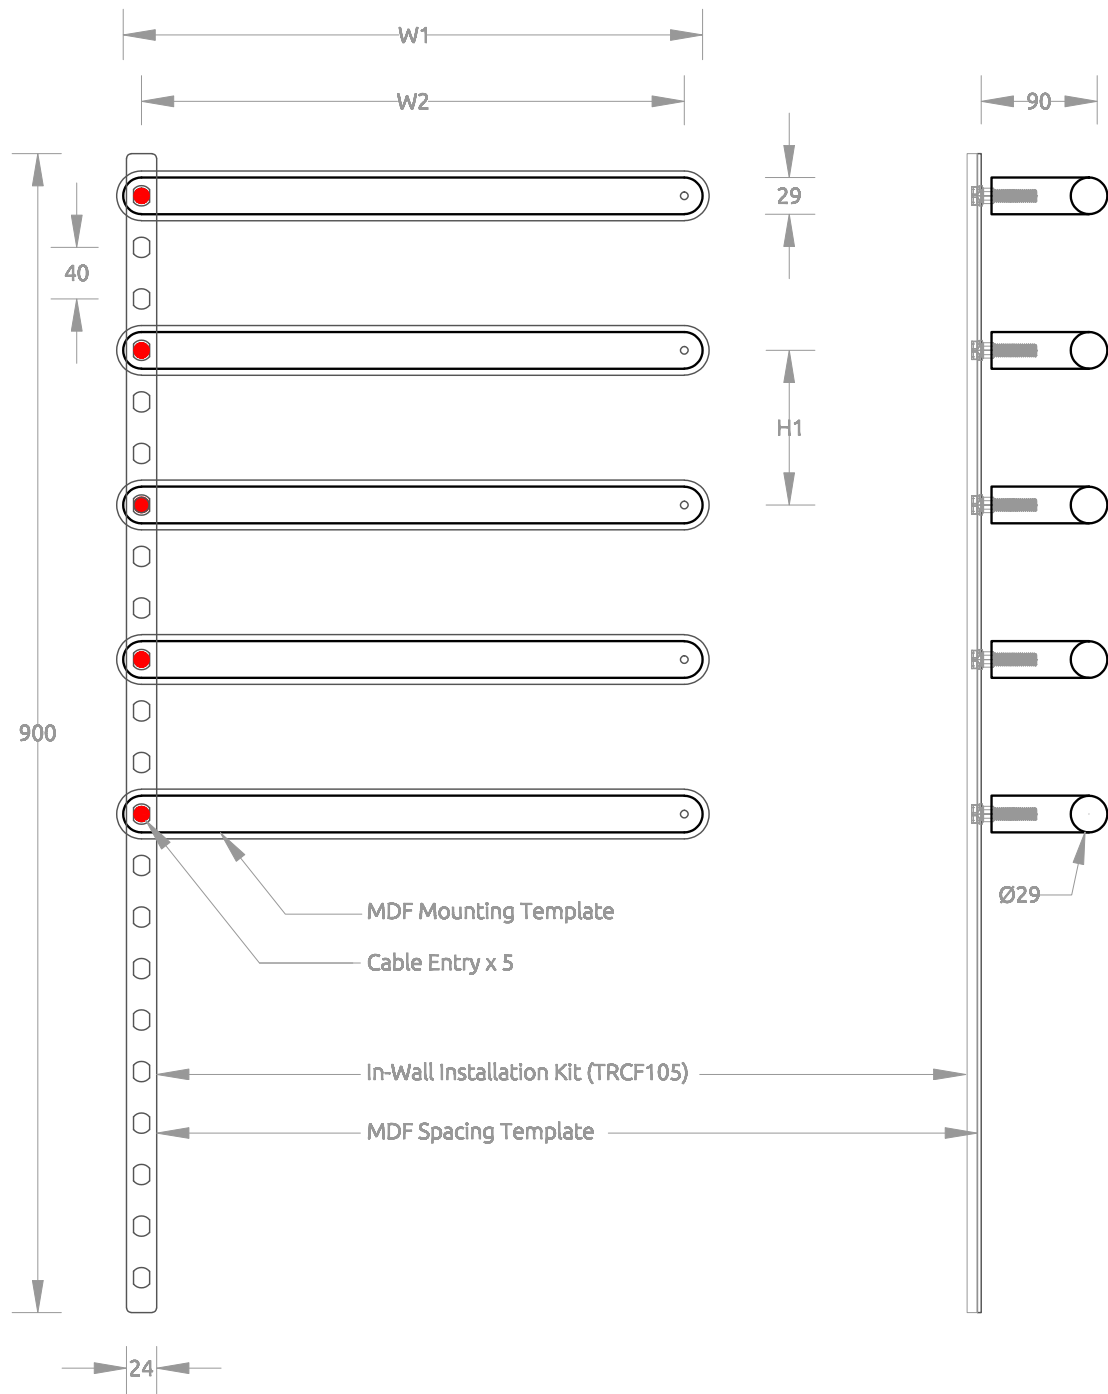

VARIATIONS

Heated Version	Non-Heated Version	H1 (Spacing)	W1 (Overall)	W2 (Fixings)
TRH1-45	TRN1-45	40mm x Spaces	450mm	421mm
TRH1-65	TRN1-65	40mm x Spaces	650mm	621mm
TRH1-85	TRN1-85	40mm x Spaces	850mm	821mm