



Technical Specifications

VERSION 2019.07-001



Therm 6

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH9-85 x 40	TLN9-85 x 40	850 x 428 mm	6	52 Watts
TLH9-85 x 48	TLN9-85 x 48	850 x 508 mm	6	58 Watts
TLH9-85 x 60	TLN9-85 x 60	850 x 628 mm	6	66 Watts
TLH9-85 x 75	TLN9-85 x 75	850 x 778 mm	6	72 Watts
TLH9-85 x 90	TLN9-85 x 90	850 x 928 mm	6	93 Watts




NOTES


- This is a 240VAC product - Earth connection is ESSENTIAL
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less 10%)
- Plug-In version available (Plus \$20)
- TLH9-85x60 is available in Low Voltage version (+\$110)

STANDARD FINISHES

Mirror Polished Stainless Steel	Brushed Stainless Steel	Matt Black Painted	Gunmetal PVD	Brushed Gold PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 240 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA 
Material Stainless Steel 304	Electrical Connection Concealed Wiring only - any leg (Transformer required)	HEATING TIME 30 MINUTES 
Finish Mirror Polished	Heating Method Dry Internal Heating Element	WARRANTY 10 YEAR 
Ingress Protection IPX5 (Suitable for wet areas)	Non-Heated version available	

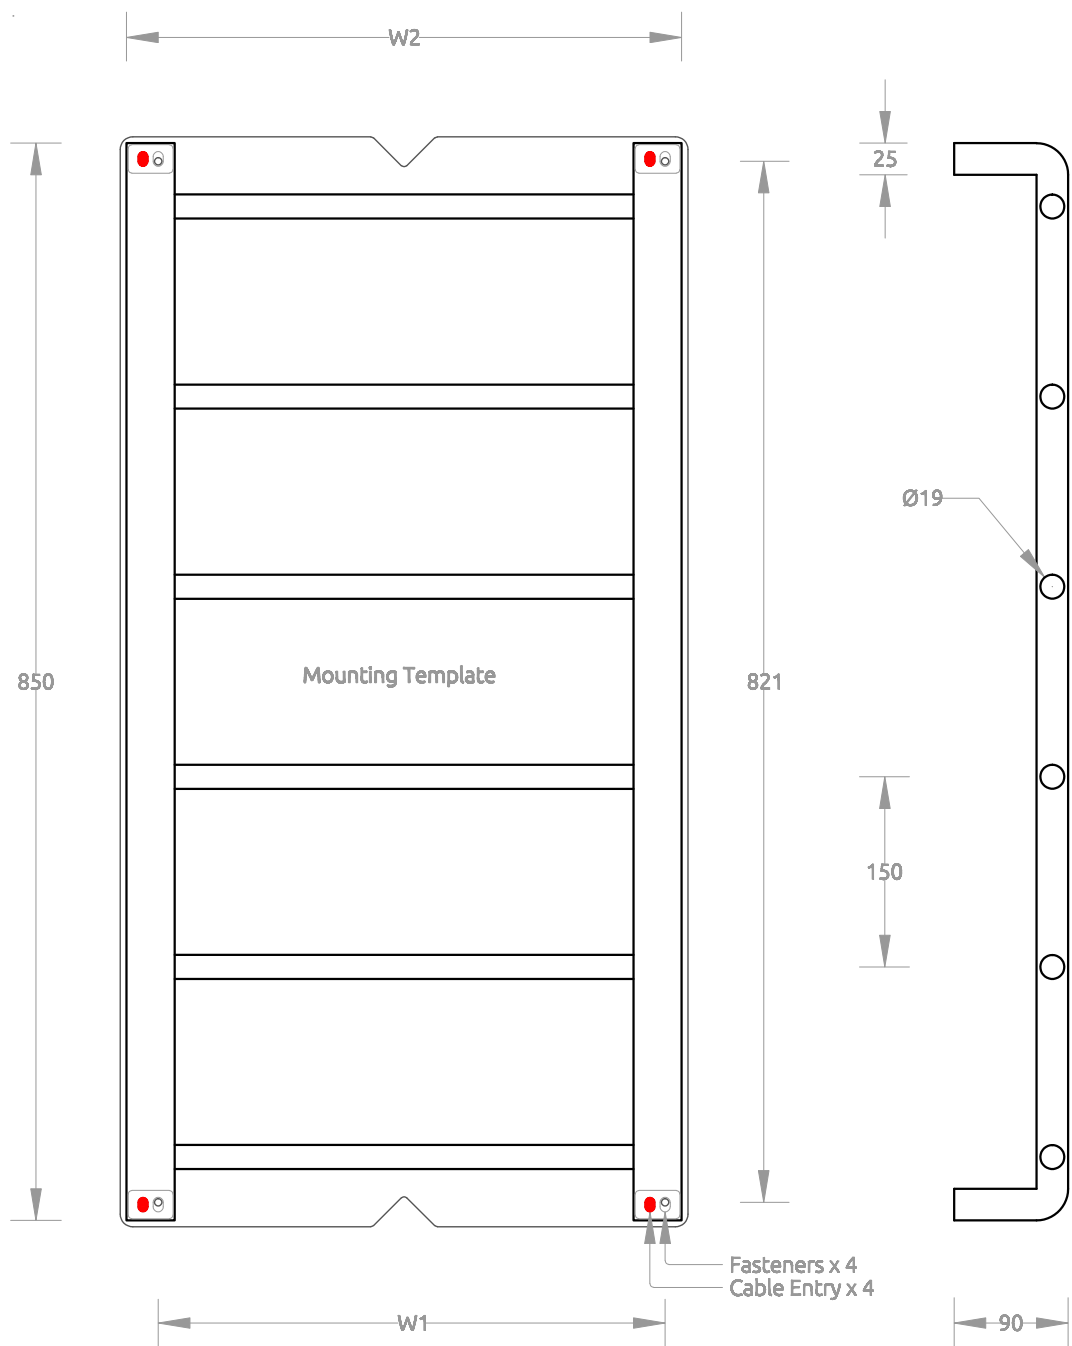

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH9-85x40	TLN9-85x40	400mm	438mm
TLH9-85x48	TLN9-85x48	480mm	518mm
TLH9-85x60	TLN9-85x60	600mm	638mm
TLH9-85x75	TLN9-85x75	750mm	788mm
TLH9-85x90	TLN9-85x90	900mm	938mm