


avenir®

Technical Specifications

VERSION 2019.07-001

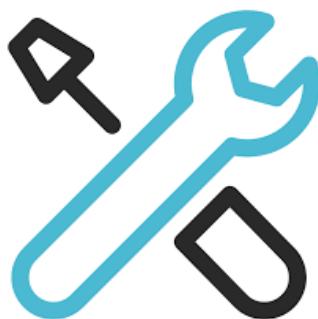

Curv

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH2-50	TRN2-50	40 x 500 mm	1 to 5	15 Watts
TRH2-77	TRN2-77	40 x 770 mm	1 to 5	23 Watts

NOTES


- This is a Low Voltage product
- Transformer required - TRTR220-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)

STANDARD FINISHES

Mirror Polished Stainless Steel	Brushed Stainless Steel	Matt Black/White Painted	Gunmetal PVD	Brushed Gold PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 24 Volts	Standards AS/NZ 60335.2.43	DEVELOPED IN AUSTRALIA
Material Stainless Steel 304	Electrical Connection Concealed Wiring only - any leg (Transformer required)	HEATING TIME 30 MINUTES
Finish Mirror Polished	Heating Method Dry Internal Heating Element	WARRANTY 10 YEAR
Ingress Protection IPX5 (Suitable for wet areas)	Non-Heated version available	

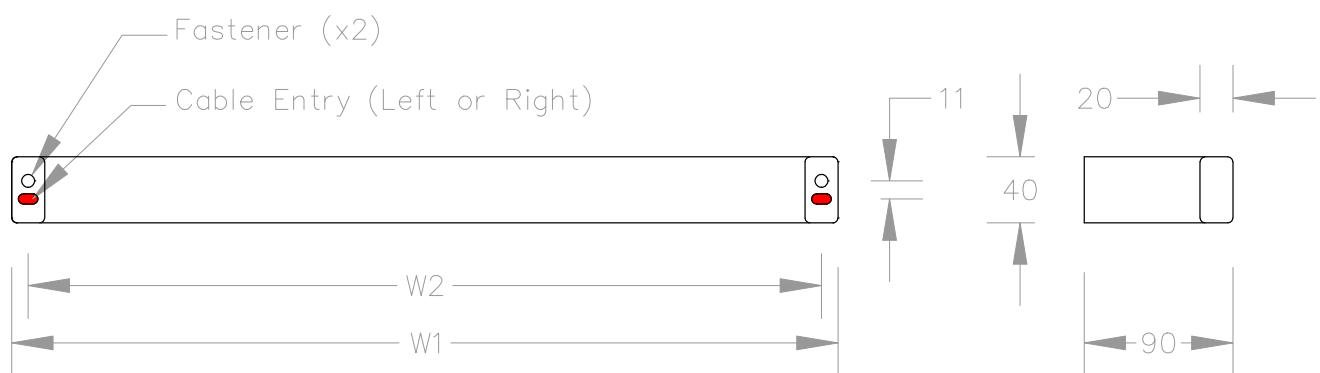

VARIATIONS

Heated Version	Non-Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH2-50	TRN2-50	40mm	500mm	480mm
TRH2-77	TRN2-77	40mm	770mm	750mm