HYDROTAP G5 BC ARC PLUS BRUSHED GOLD

BOILING   **CHILLED**

FILTERED

Order Code H5L784Z07AU

Zip HydroTap Design Range Boiling, Chilled, Filtered water tap features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.

Manufacturing Code	H5L784Z07AU
Capacity	Residential

Tap	Zip HydroTap Design Range ARC Plus Tap (Brushed Gold)
Water Pressure	Min 170kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.44kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D478mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.

2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.

3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
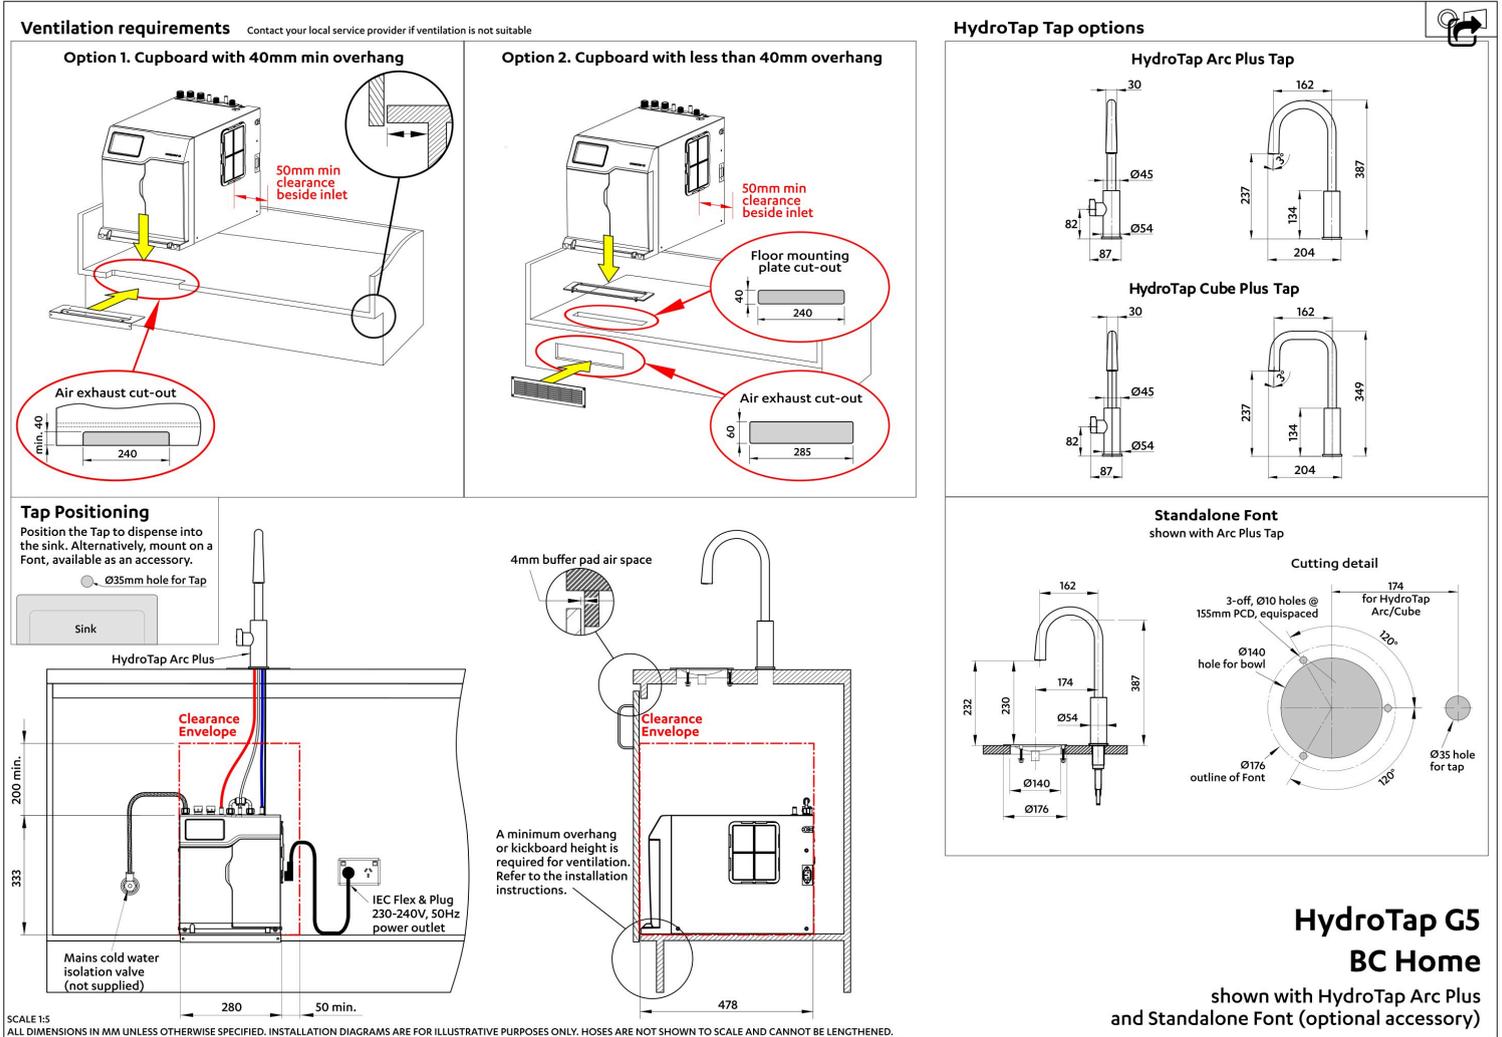
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.

5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.

6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

Ventilation requirements Contact your local service provider if ventilation is not suitable

Option 1. Cupboard with 40mm min overhang

Option 2. Cupboard with less than 40mm overhang

50mm min clearance beside inlet

Floor mounting plate cut-out — 40 — 240

Air exhaust cut-out — min. 40 — 240

Air exhaust cut-out — 60 — 285

Tap Positioning
Position the Tap to dispense into the sink. Alternatively, mount on a Font, available as an accessory.
Ø35mm hole for Tap
Sink
HydroTap Arc Plus

Clearance Envelope

200 min.
333

Mains cold water isolation valve (not supplied)
280
50 min.

IEC Flex & Plug 230-240V, 50Hz power outlet

4mm buffer pad air space

Clearance Envelope

A minimum overhang or kickboard height is required for ventilation. Refer to the installation instructions.

478

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap Tap options

HydroTap Arc Plus Tap
30   162
Ø45   237   387
82   134
Ø54   204
87

HydroTap Cube Plus Tap
30   162
Ø45   237   349
82   134
Ø54   204
87

Standalone Font
shown with Arc Plus Tap

162
232   230   174   387
Ø54
Ø140
Ø176

Cutting detail
3-off, Ø10 holes @ 155mm PCD, equispaced
174 for HydroTap Arc/Cube
120°
Ø140 hole for bowl
Ø176 outline of Font
Ø35 hole for tap
120°

HydroTap G5
BC Home
shown with HydroTap Arc Plus
and Standalone Font (optional accessory)